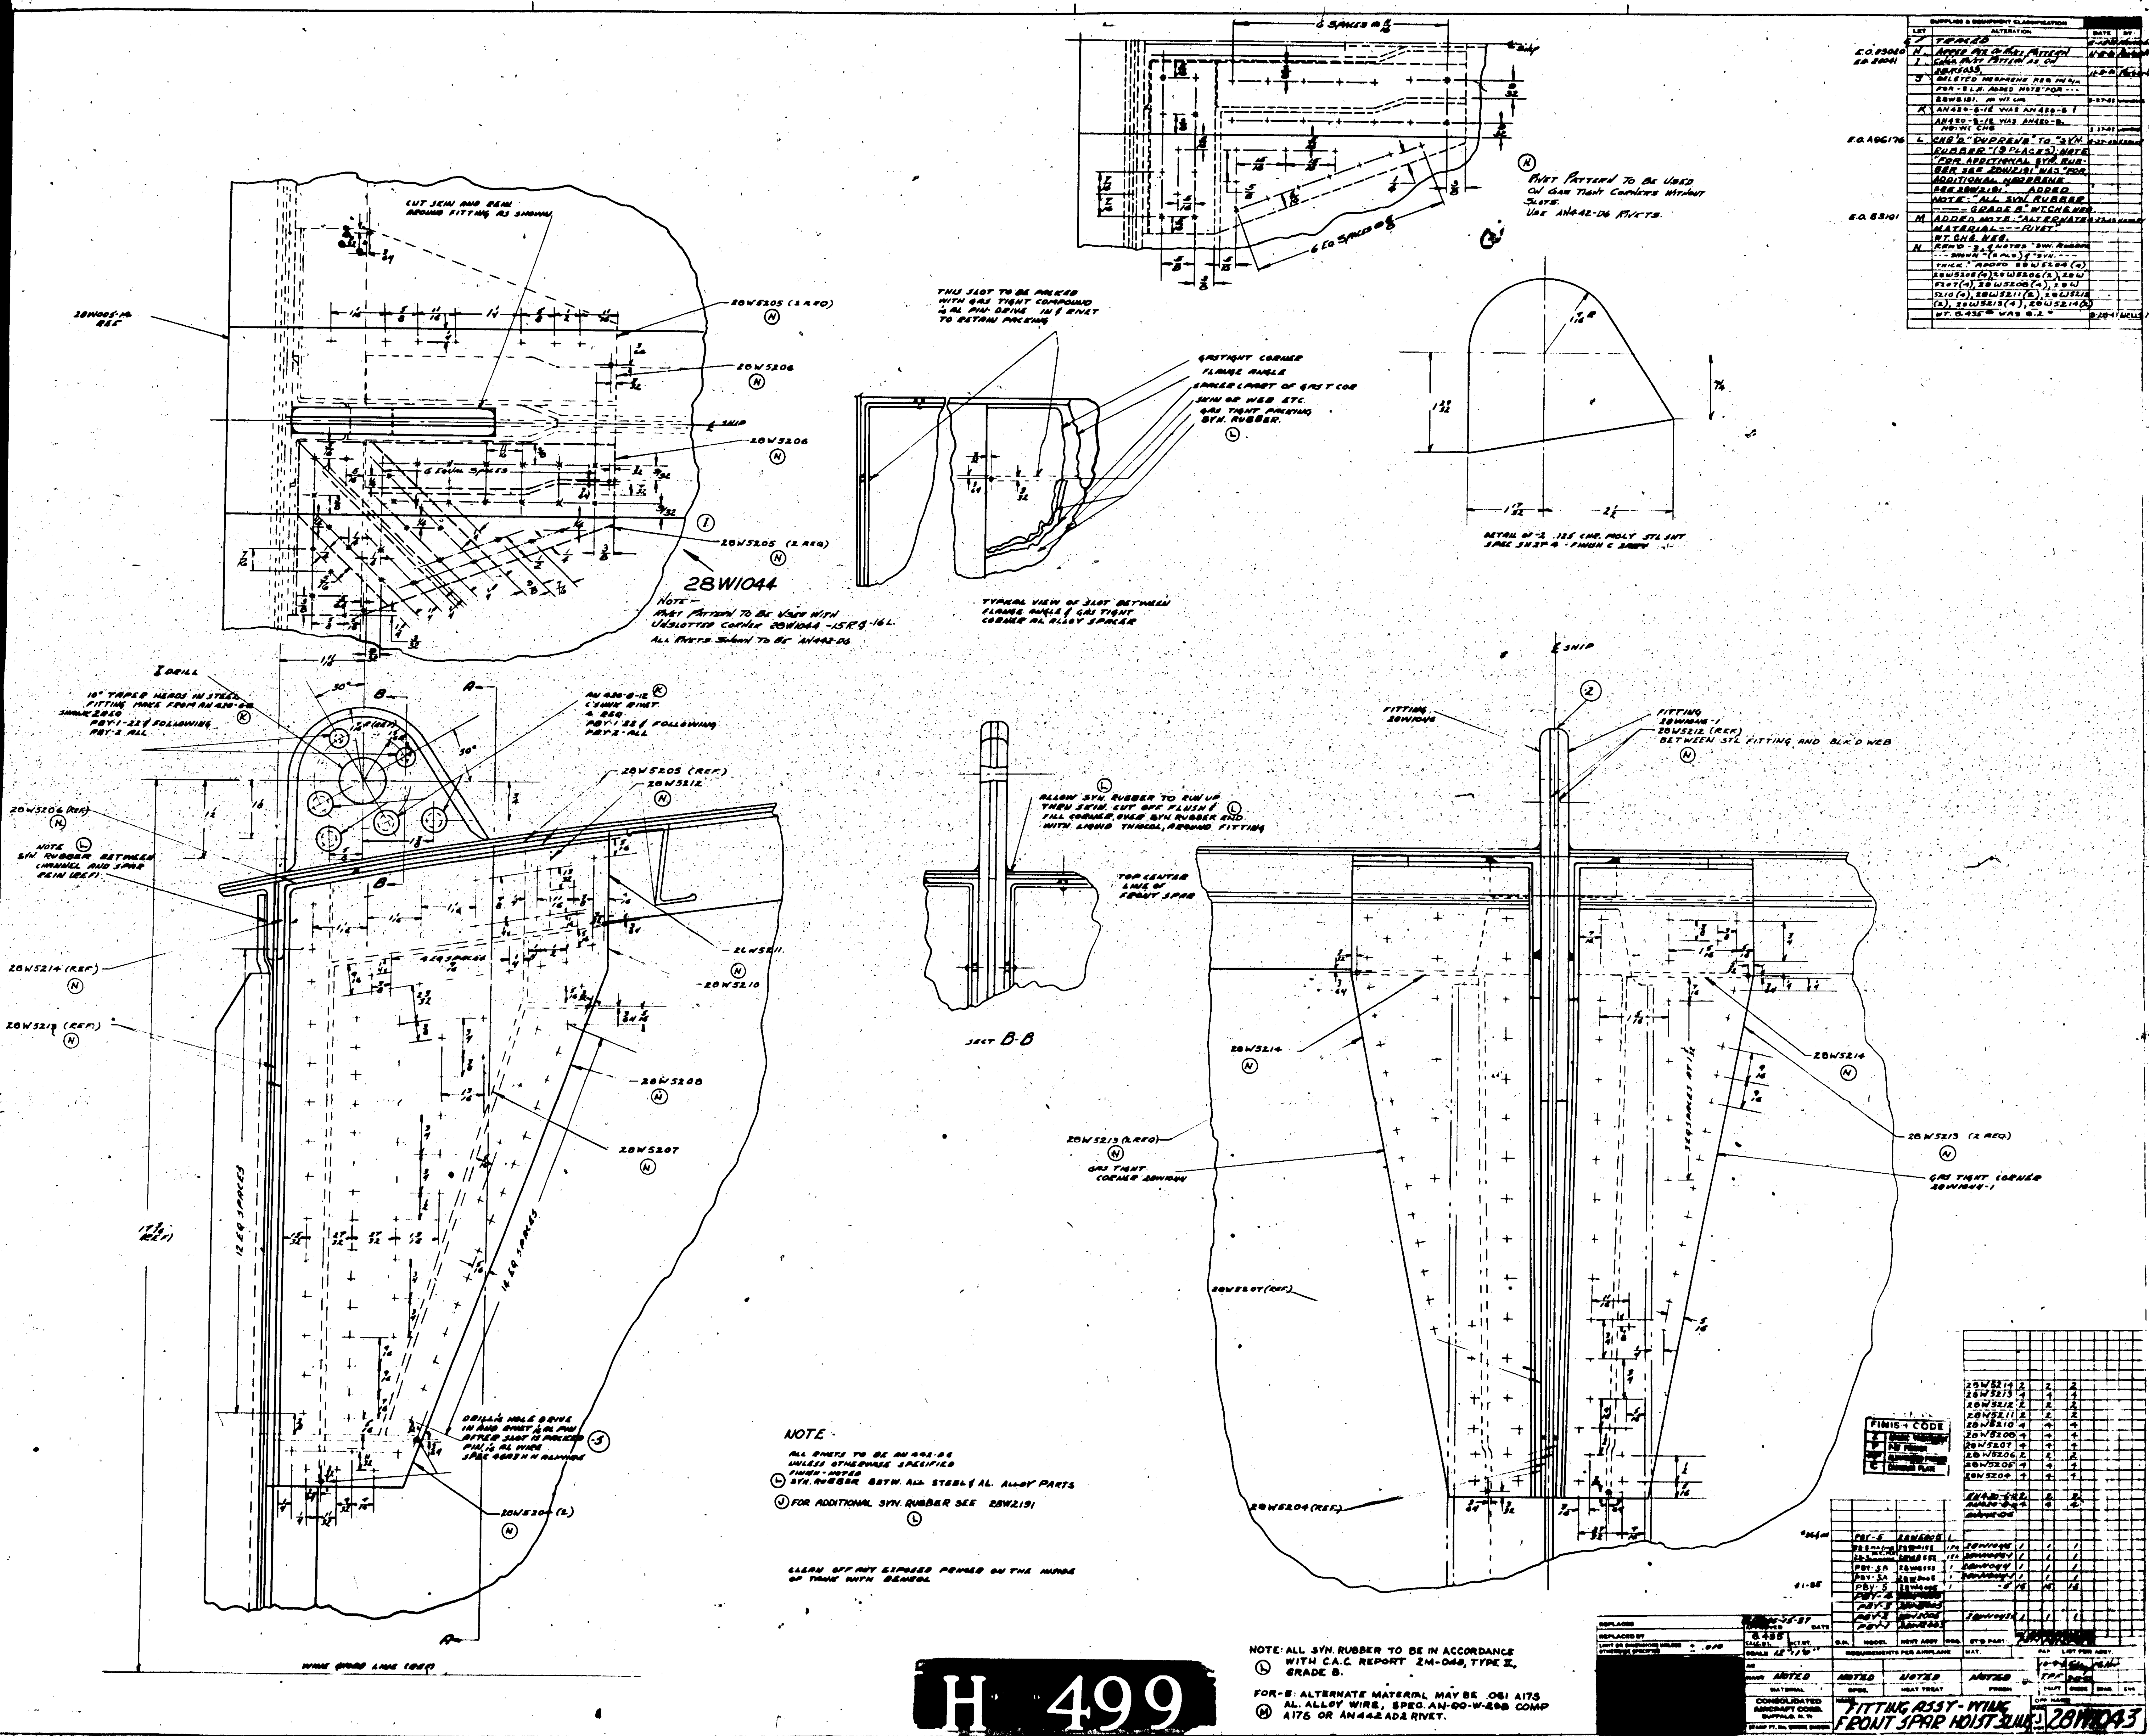

CUT SKIN AND BEND AROUND FITTING AS SHOWN
28W1044
NOTE - RIVET PATTERN TO BE USED WITH UNSLOTTED CORNER 28W1044 -15R & -16L.
ALL RIVETS SHOWN TO BE AN442-D6
THIS SLOT TO BE PACKED WITH GAS TIGHT COMPOUND
GASTIGHT CORNER
FLANGE ANGLE
SKIN OF WEB ETC.
GAS TIGHT PACKING SYN. RUBBER.
TYPICAL VIEW OF SLOT BETWEEN FLANGE ANGLE & GAS TIGHT CORNER AL ALLOY SPACER
RIVET PATTERN TO BE USED ON GAS TIGHT CORNERS WITHOUT SLOTS. USE AN442-D6 RIVETS.
28W5205 (2 REQ)
28W5206
28W5212
28W5211
28W5210
28W5208
28W5207
28W5214 (REF.)
28W5213 (REF.)
28W5204 (REF.)
SECT B-B
TOP CENTER LINE OF FRONT SPAR
ALLOW SYN. RUBBER TO RUN UP THRU SKIN. CUT OFF FLUSH
FITTING 28W1046
FITTING 28W1046-1
BETWEEN STL FITTING AND BLK'D WEB
GAS TIGHT CORNER 28W1044-1
NOTE
ALL RIVETS TO BE AN442-D6 UNLESS OTHERWISE SPECIFIED
SYN. RUBBER BETW. ALL STEEL & AL. ALLOY PARTS
FOR ADDITIONAL SYN. RUBBER SEE 28W2191
CLEAN OFF ANY EXPOSED PRIMER ON THE INSIDE OF TANK WITH BENZOL
WING CHORD LINE (REF)
NOTE: ALL SYN. RUBBER TO BE IN ACCORDANCE WITH C.A.C. REPORT ZM-048, TYPE II, GRADE B.
FOR-5: ALTERNATE MATERIAL MAY BE .061 A17S AL. ALLOY WIRE, SPEC. AN-QQ-W-298 COMP A17S OR AN442AD2 RIVET.
CONSOLIDATED AIRCRAFT CORP. BUFFALO, N.Y.
FITTING ASSY - WING FRONT SPAR HOIST SLING
28W1043
H 499